
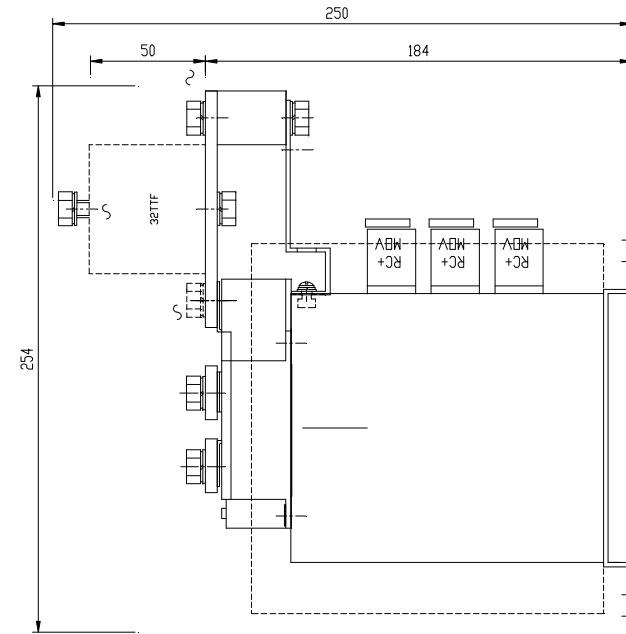


DRG.No.B 020069

POWERSEM LTD.

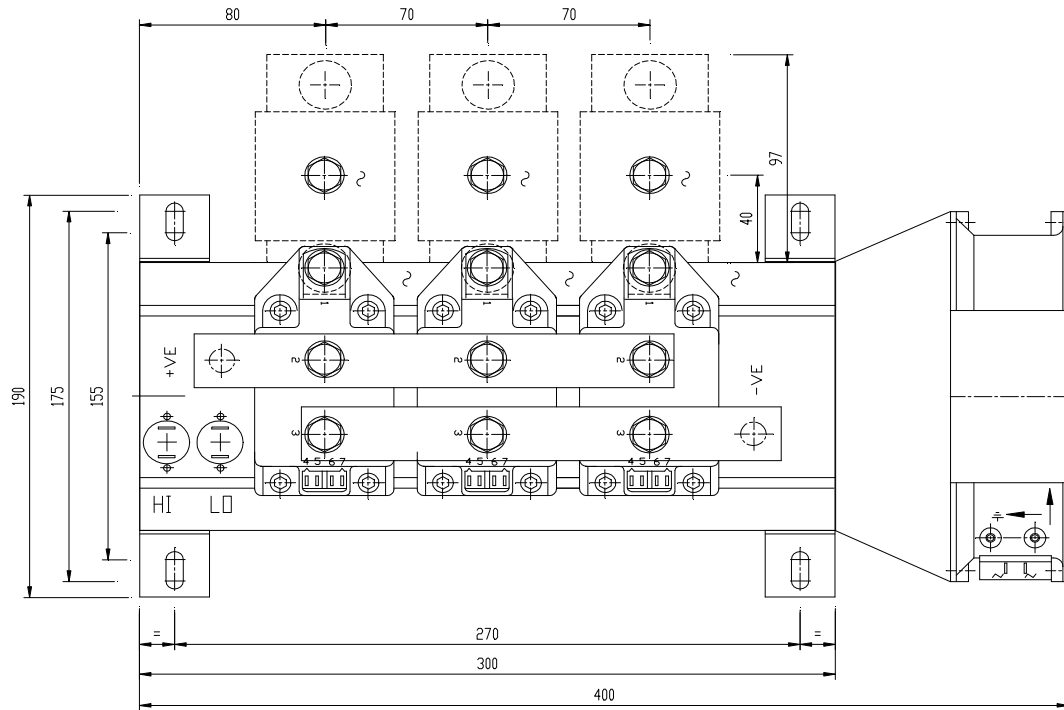

CONNECTIONS AC M8.
 CONNECTIONS DC M10.
 FIXINGS M6 CLEAR.
 FAN 110V or 240V ~ / 50W max.

Fuses, Dv/Dt,
 Thermal Trips optional.

FOR B6U USE MDD/xx
 FOR B6H USE MCD/xx
 FOR B6C USE MCC/xx

TOLERANCES UNLESS SPECIFIED UNLIMITED DIMENSIONS TO BE ± 0.2 ANGLES ± 0° - 30° HOLES + 0.1 - 0.02	REMOVE SHARP EDGES ALL DIMENSIONS IN MILLIMETRES CHAMFER ALL THREADS AT 45 TO ROOT DIAMETER.	POWERSEM LTD OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND WHICH MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION IN WRITING FROM THE OWNERS. © POWERSEM LTD.	TITLE: B6U/H/C Mxx/xx PS260/300BF(6")				JOB:		
			MATERIAL:		SCALE 1:2		SPEC.		
ASSEMBLY DN:		THIRD ANGLE PROJECTION				DRAWN PB		CHK'D MP	
ASSEMBLY DN:						ISSUE No		1/08.01.04	

ASSEMBLY DIV | FIND ANGLE FULJELJLIN | ISSUE NO 1/080104 | MINIMUM VALUE