


When Hi/Lo trips fitted  
Mount left & right respectively

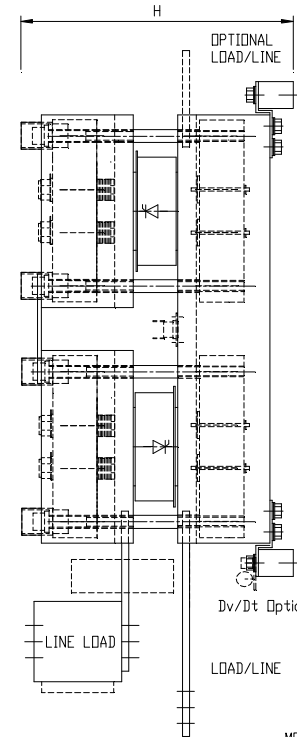

DIM 'H'	
26mm Device	220mm
33mm device	230mm
38mm Device	234mm

MOUNTING 4\*M8 PER PHASE  
CONNECTION HOLES M8 CLEAR  
G/K LEADS 600mm  
FUSES, ACCT, TT, Dv/Dt OPTIONAL.

TOLERANCES UNLESS SPECIFIED  
UNLIMITED DIMENSIONS TO BE ± 0.2  
ANGLES ± 0° 30°  
HOLES + 0.1 - 0.02

REMOVE SHARP EDGES  
ALL DIMENSIONS IN MILLIMETRES  
CHAMFER ALL THREADS AT 45 TO  
ROOT DIAMETER.

POWERSEM LTD OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS  
SUPPLIED IN CONFIDENCE AND WHICH MUST NOT BE USED FOR ANY PURPOSE OTHER THAN  
THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION  
IN WRITING FROM THE OWNERS. © POWERSEM LTD.

TITLE: W3C-DCRxx/x PS257/400/180B

JOB:

MAT'L:

SPEC:

FINISH:

SCALE 1:4

DRAWN PB

CHK'D MP

MOD. No

ISSUE No 2/08.09.96

DRG.No.B 020131

ASSEMBLY DN:  
ASSEMBLY DN

THIRD ANGLE PROJECTION

