



DRG.No.B 020425

POWERSEM LTD.

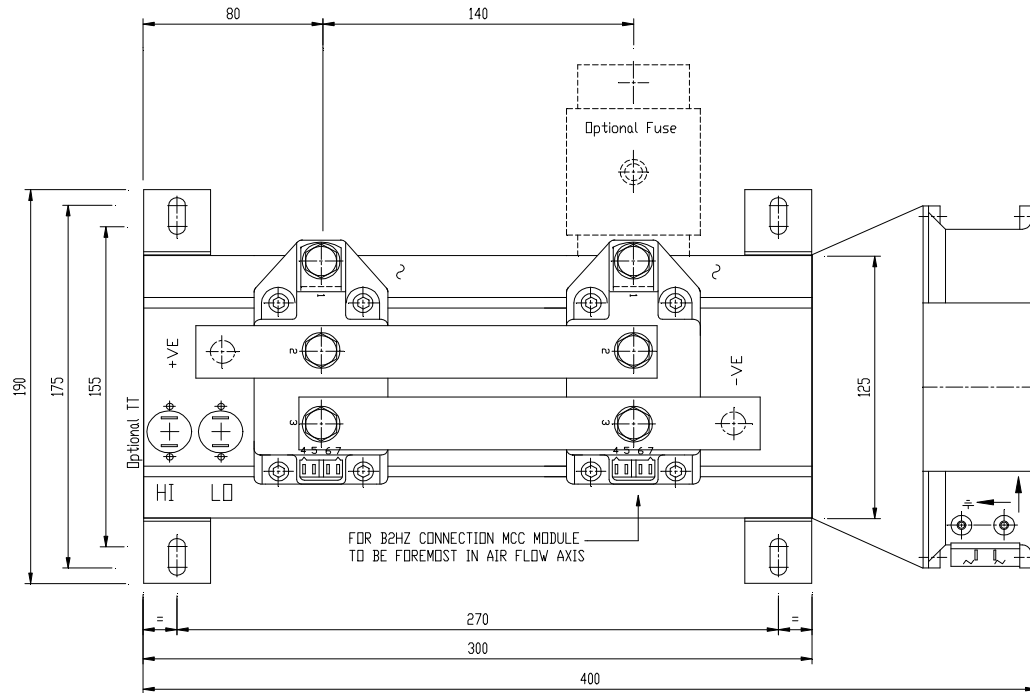

END VIEW SHOWS OPTIONAL FUSES & DV/Dt IF FITTED.

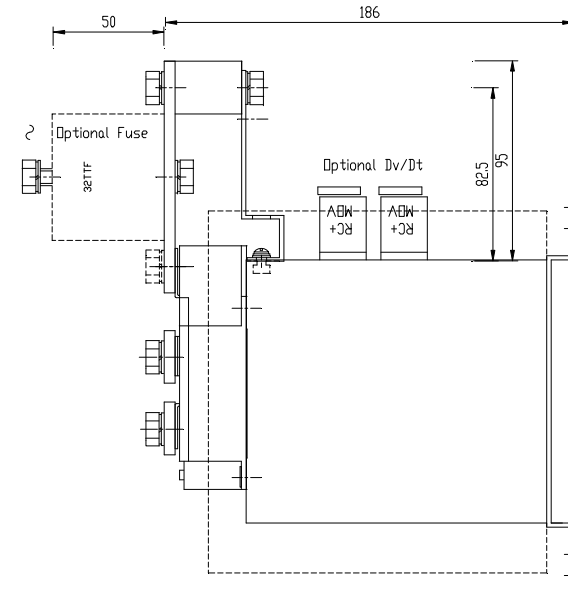

CONNECTIONS AC M8.
CONNECTIONS DC M10.
FIXINGS M6 CLEAR.
FAN 110V or 240V ~ / 50W max.

FOR B2U USE MDD
FOR B2HK USE MCD
FOR B2HZ USE MCC MDD UPPER
FOR B2C USE MCC

TOLERANCES UNLESS SPECIFIED
UNLIMITED DIMENSIONS TO BE ± 0.2
ANGLES $\pm 0^\circ - 30^\circ$
HOLES $+0.1 - 0.02$

REMOVE SHARP EDGES
ALL DIMENSIONS IN MILLIMETRES
CHAMFER ALL THREADS AT 45 TO
ROOT DIAMETER.

POWERSEM LTD OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS
SUPPLIED IN CONFIDENCE AND WHICH MUST NOT BE USED FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS SUPPLIED, AND MUST NOT BE REPRODUCED WITHOUT PERMISSION
IN WRITING FROM THE OWNERS. © POWERSEM LTD.

TITLE: B2U/H/C/Z Mxx/xx PS260/300BF(6*)

JOB:

MAT'L:

SPEC.

FINISH:

SCALE 1:2

DRAWN PB

CHK'D MP

MDD No

ISSUE No 1/08.01.04

DRG.No.B 020425

ASSEMBLY DN:
ASSEMBLY ON

THIRD ANGLE PROJECTION