



Precision Pulse Control

The PVX-4000-2kV is an air-cooled, high voltage pulse generator. Optimized for high impedance capacitive loads, the PVX-4000-2kV is well-suited for driving extraction grids and deflection plates for electrostatic modulation of particle beams in time-of-flight mass spectrometers and accelerators.

System Operation

The output voltage can be set from 0 V to ± 2000 V. Duty cycles from 2% to 98% and repetition rates from 40 Hz to 30,000 Hz are supported by the internal trigger source.

Pulse widths from 500 ns to DC and repetition rates from single-shot to 30,000 Hz are supported when an external trigger source is used.

With a built-in trigger source and the internal positive and negative high-voltage DC power supplies, the PVX-4000-2kV can be used as a standalone test system. Programming is done through a front panel control panel as well as RS-232 and USB computer interfaces.

When changing the frequency, the duty cycle is maintained and the new pulse width is displayed. It is recommended that the frequency be changed before the pulse width is changed.

Computer Interfaces

For automated applications, complete control of the instrument is provided through RS-232 and USB computer interfaces. Up to five system configurations may be stored in internal non-volatile memory, providing instant recall of frequently-used configurations.

Control Signals


Conveniently-located front panel BNC connectors allow the PVX-4000-2kV to be externally triggered. The impedance of the gate input is 50 Ω .

The system has a Sync output for interconnection to other equipment. The pulse from the Sync output is synchronized to the leading edge of the output voltage pulse. The impedance of the sync output is 50 Ω .

The system can easily be monitored through the Voltage Monitor BNC connection using an oscilloscope set to 1 M Ω termination.

Ordering Information

PVX-4000-2kV

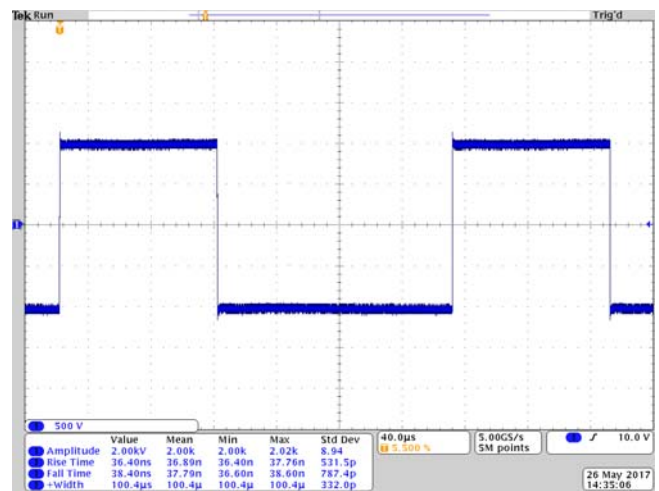

+1000 V & -1000 V, 4 kHz, 100.4 μ s, 344 pF Load



+50 V & -50 V, 4 kHz, 100.4 μ s, 344 pF Load

For sales information or technical questions contact your local IXYS representative or IXYS Colorado directly at:

Sales: **970.493.1901** or sales@ixyscolorado.com
 Technical Support: techsupport@ixyscolorado.com

Pulse Characteristics

Output Voltage Range	0 V to ± 2000 V
Voltage Overshoot	< 2%
Voltage Rise/Fall Time	≤ 50 ns from 500 V to 2000 V ≤ 100 ns from 200 V to 500 V
Voltage Rise/Fall Time	≤ 50 ns from -500 V to -2000 V ≤ 100 ns from -200 V to -500 V

Output Power **Refer to SOA Graphs**

Internal Trigger

Frequency Range	40 Hz to 30000 Hz
Frequency Resolution	40 Hz to 1000 Hz @ 10 Hz 1100 Hz to 30000 Hz @ 100 Hz

Pulse Width	2% to 98% Duty Cycle
Pulse Width Resolution	6.4 μ s from 40 Hz to 1000 Hz 0.4 μ s from 1100 Hz to 5000 Hz 0.05 μ s from 5100 Hz to 30000 Hz

External Gate

Frequency Range	Single-shot to 30000 Hz
Trigger Pulse Width	500 ns to 100% duty cycle
Termination Impedance	50 Ω
Connector	BNC
Input Voltage Levels	0 V input = output pulse off +5 V input = output pulse on

Monitors

Voltage Monitor	1000 V / 10 V (typical), see note 3.
Voltage Monitor Termination	1 M Ω
Voltage Monitor Connector	BNC
Sync Termination	50 Ω
Sync Connector	BNC
Sync Output Voltage Levels	0 V output = - HV output pulse < +3.3 V output = + HV output pulse

Output Connector

Pulsed Output Connector	Winchester Kings 10 kV, Rear Panel 1065-2 plug
-------------------------	---

Power Specifications

Voltage Requirements	100 VAC to 120 VAC \pm 10% 220 VAC to 240 VAC \pm 10%
Line Frequency	50 Hz to 60 Hz
Power Requirements	600 W
AC Connector Type	NEMA C-14

General

Size (HxWxD)	15 cm x 49 cm x 52 cm
Weight	8 kg
Operating Temperature	15 $^{\circ}$ C to 35 $^{\circ}$ C
Computer Communication	RS-232 and USB, @ 115200 baud, 8 data bits, no parity, 1 stop bit, and no flow control

Notes

Warranty: One year parts and labor on defects in materials and workmanship.

1. The PVX-4000-2kV voltage source meets or exceeds these specifications. The unit was tested driving a **360 pF** load at 2000 V output. The load consisted of a 56 pF capacitor attached to the 2 meter cable with typical capacitance of 48 pF / 30.5 cm of cable.
2. The factory supplied output cable has 48 pF / 30.5 cm of cable. This needs to be calculated in the load value.
3. V_{MON} is designed to be used with RG 58/U 2ft long coax cable connected between the V_{MON} BNC output and an oscilloscope terminated in to a 1 M ohm input impedance.

Specifications subject to change without notice.

Document 7675-0020 Rev A00



For sales information or technical questions contact your local IXYS representative or IXYS Colorado directly at:

Sales: **970.493.1901** or sales@ixyscolorado.com

Technical Support: techsupport@ixyscolorado.com

Safe operating area graphs; stay below the line for proper operation.

