

THREE PHASE AC MOTOR SOFT STARTERS


GD Rectifiers

QUALITY & SERVICE

OPTIONS **FITTED LINE FUSES, INDICATORS, MICRO SWITCHES.**
Dv/Dt SUPPRESSION
MOV OVER VOLTAGE SUPPRESSION
Hi/Lo THERMAL TRIPS

WATER COOLED OPTIONS.
HIGHER VOLTAGES
IP20 ENCLOSED
STANDBY FANS
TRIGGER CIRCUITS.

CONSULT FACTORY.

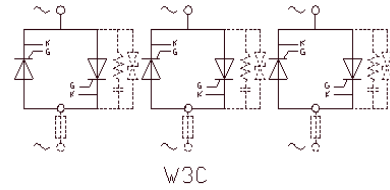

ISOLATED DEVICES (IP00)

DWG No	Run / Start Amps @ 30C	Nom Kw 380/415V	Run / Start Amps @ 40C	Cooling Mode	DEVICE I2T A2S *1000 @TVJ	DEVICE VRRM MAX	Height mm	Width mm	Depth mm	Weight KG
W3C-SS 020004	9/45	4	9/41	NAC	0.6	1600	150	96	80	1
W3C-SS 020480	12/60	5.5	12/54	NAC	0.6	1600	300	200	80	3.5
W3C-SS 020500	16/80	7.5	16/72	NAC	0.65	1600	200	160	80	2
W3C-SS 020480	16/80	7.5	16/72	NAC	1.05	1600	300	200	80	3.5
W3C-SS 020480	23/115	11	23/104	NAC	5	1800	300	200	80	3.5
W3C-SS 020480	32/160	15	32/144	NAC	9.1	1800	300	200	80	3.5
W3C-SS 020480	37/185	18	37/167	NAC	11.85	1800	300	200	80	3.5
W3C-SS 020480	45/225	22	45/203	NAC	20	1800	300	200	80	3.5
W3C-SS 020009	63/315	30	63/284	FAC	20	1800	350	125	180	6.6
W3C-SS 020012	86/430	45	86/387	FAC	115	1800	350	125	180	7
W3C-SS 020012	105/525	55	105/473	FAC	137	1800	350	125	180	7
W3C-SS 020016	140/630	75	140/560	FAC	245	1600	350	135	180	8
W3C-SS 020016	140/700	75	140/630	FAC	304	1800	350	135	180	8
W3C-SS 020016	168/756	90	168/672	FAC	320	1800	350	135	180	8
W3C-SS 020946	280/1400	150	280/1260	FAC	1050	1800	552	248	235	17.5

ISOLATED DEVICES (IP20 STD)

DWG No	Run / Start Amps @ 30C	Nom Kw 380/415V	Run / Start Amps @ 40C	Cooling Mode	DEVICE I2T A2S *1000 @TVJ	DEVICE VRRM MAX	Height mm	Width mm	Depth mm	Weight KG
W3C-SS 020600	16/80	7.5	16/72	NAC	1.05	1600	325	164	195	7
W3C-SS 020600	25/125	11	25/113	NAC	1.05	1600	325	164	195	7
W3C-SS 020600	30*150	15	30/135	NAC	5	1800	325	164	195	7
W3C-SS 020600	45/225	22	45/203	NAC	20	1800	325	164	195	7
W3C-SS 020620	60/300	30	60/270	FAC	89	1800	430	254	280	14
W3C-SS 020620	75/375	37	75/338	FAC	137	1800	430	254	280	14
W3C-SS 020620	85/425	45	85/383	FAC	137	1800	430	254	280	14
W3C-SS 020620	120/600	63	120/540	FAC	137	1800	430	254	280	14
W3C-SS 020630	145/725	75	145/653	FAC	245	1800	430	254	280	14
W3C-SS 020630	170/850	90	170/765	FAC	304	1800	430	254	280	14
W3C-SS 020630	205/1025	110	205/923	FAC	320	1800	430	254	280	14



CONT

THREE PHASE AC MOTOR SOFT STARTERS


GD Rectifiers

QUALITY & SERVICE

OPTIONS **FITTED LINE FUSES, INDICATORS, MICRO SWITCHES.**
Dv/Dt SUPPRESSION
MOV OVER VOLTAGE SUPPRESSION
Hi/Lo THERMAL TRIPS

WATER COOLED OPTIONS.
HIGHER VOLTAGES
IP20 ENCLOSED
STANDBY FANS
TRIGGER CIRCUITS.

CONSULT FACTORY.

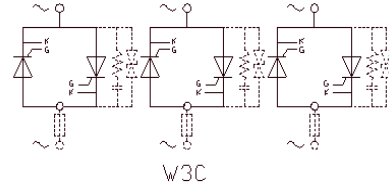

DISCRETE DEVICES (IP20 STD)

DWG No	Run / Start Amps @ 30C	Nom Kw 380/415V	Run / Start Amps @ 40C	Cooling Mode	DEVICE I2T A2S *1000 @TVJ	DEVICE VRRM MAX	Height mm	Width mm	Depth mm	Weight KG
W3C-SS 020660	280/1260	150	280/1120	FAC	430	1400	580	368	228	28
W3C-SS 020660	370/1850	200	370/1665	FAC	1125	1600	580	368	228	28
W3C-SS 020680	460/2070	250	460/1840	FAC	1125	1600	720	462	253	45
W3C-SS 020680	580/2900	315	580/2610	FAC	4380	1600	720	462	253	45
W3C-SS 020135	720/3600	400	720/3240	FAC	4380	1600	910	650	340	120
W3C-SS 020135	1100/5500	600	1100/4950	FAC	6850	1600	910	650	340	130
W3C-SS 020135	1400/7000	800	1400/6300	FAC	20480	1200	910	650	340	130

