

Stud-Base Silicon Rectifier Diodes Type PCN/PCR075

75 amperes average: up to 1200 volts V_{RRM}

RATINGS Maximum values at 175°C T_j unless stated otherwise

RATING	CONDITIONS	SYMBOL	
Average forward current	Half sine wave 135°C case temperature	$I_{F(AV)}$	75A
RMS current		$I_{F(RMS)}$	118A
DC forward current		I_F	118A
Peak one-cycle surge (non repetitive)	10ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leq 10 \text{ volts} \end{array} \right.$	$I_{FSM(1)}$	1300A
		$I_{FSM(2)}$	1495A
Maximum permissible surge energy	10ms duration $\left\{ \begin{array}{l} 60\% V_{RRM} \text{ re-applied} \\ V_R \leq 10 \text{ volts} \end{array} \right.$	$I^2 t (1)$	8450A ² s
	3ms duration $V_R \leq 10 \text{ volts}$	$I^2 t (2)$	11175A ² s 8284A ² s
Case operating temperature		T _C	-55, +175°C
Storage temperature		T _{stg}	-55, +175°C

CHARACTERISTICS Maximum values at 175°C T_j unless stated otherwise

CHARACTERISTIC	CONDITIONS	SYMBOL	
Peak forward voltage drop	At 388A, I_{FM}	V_{FM}	1.51V
Forward conduction threshold voltage		V_0	0.925V
Forward conduction slope resistance		r	1.5mΩ
Peak reverse current	At V_{RRM}	I_{RRM}	10mA
Thermal resistance junction to case for a diode with a maximum forward voltage drop characteristic	DC and 180° sine wave 120° rectangular wave	$R_{th(j-c)}$	0.44°C/W 0.58°C/W
Thermal resistance case to heatsink		$R_{th(c-hs)}$	0.1°C/W

VOLTAGE CODE →	02	04	06	08	10	12			
Repetitive voltage V_{RRM}	200	400	600	800	1000	1200			
Non-repetitive voltage V_{RSM}	300	500	700	900	1100	1300			

ORDERING INFORMATION (Please quote device code as explained below – 10 digits)

S	W	●	●	P	C	●	0	7	5
FIXED BASIC CODE	VOLTAGE CODE (see above)	FIXED OUTLINE CODE DO5		STUD POLARITY N = cathode R = anode		FIXED TYPE CODE			

Typical code SW06PCR075 = 600V_{RRM} diode with stud anode

In the interest of product improvement, Westcode reserves the right to change specifications at any time without notice.

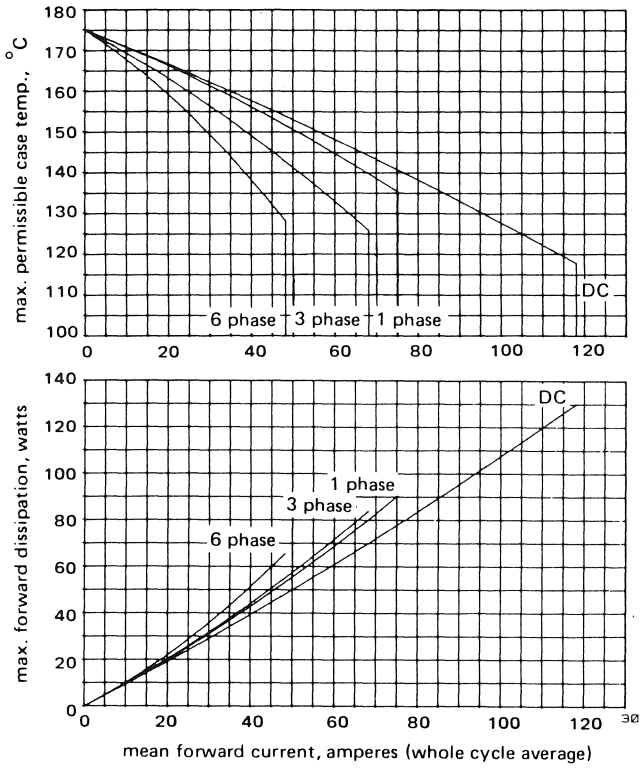


Figure 1 Dissipation and stud temperature v. mean forward current

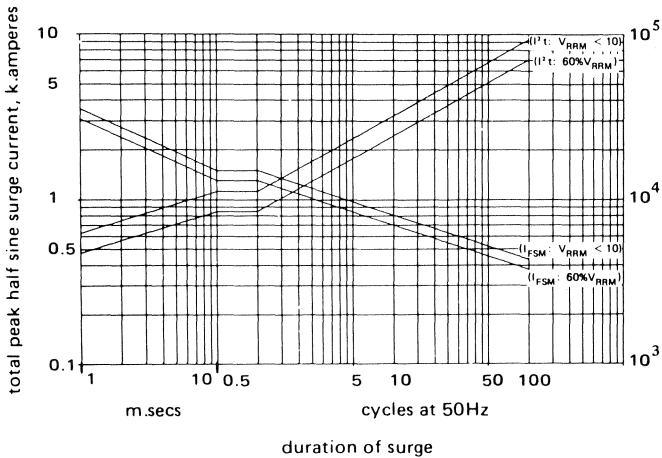


Figure 2 Max. non repetitive surge current at initial junction temperature 175°C

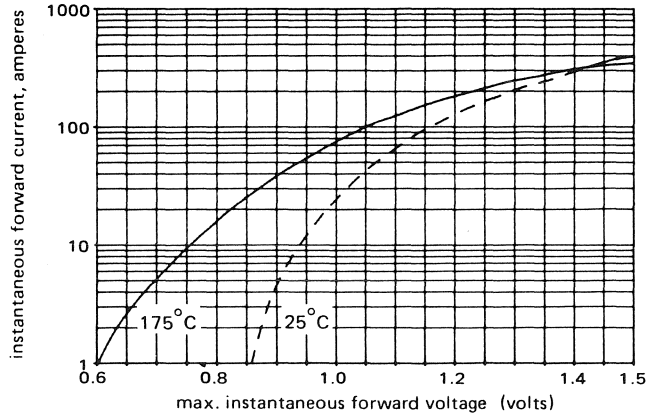


Figure 3 Forward voltage characteristic


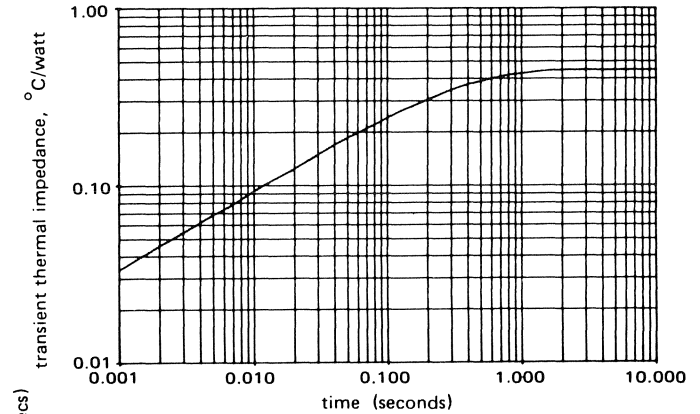


Figure 4 Transient thermal impedance, junction to case



Mounting Torque
0.41 – 0.48 KgM
threads not to be
lubricated

Weight: 17 grams

dimensions
in mm (inches)

Conforms to DO - 5

In the interest of product improvement Westcode reserves the right to change specifications at any time without notice. © Westcode Semiconductors Ltd.



WESTCODE SEMICONDUCTORS LIMITED

P.O.Box 57, Chippenham, Wiltshire, England SN15 1JL

Telephone (Sales): +44 1249 444524.

Telefax(Sales): + 44 1249 659448

A member of the BTR Group